


PCB Separator MAESTRO 3E

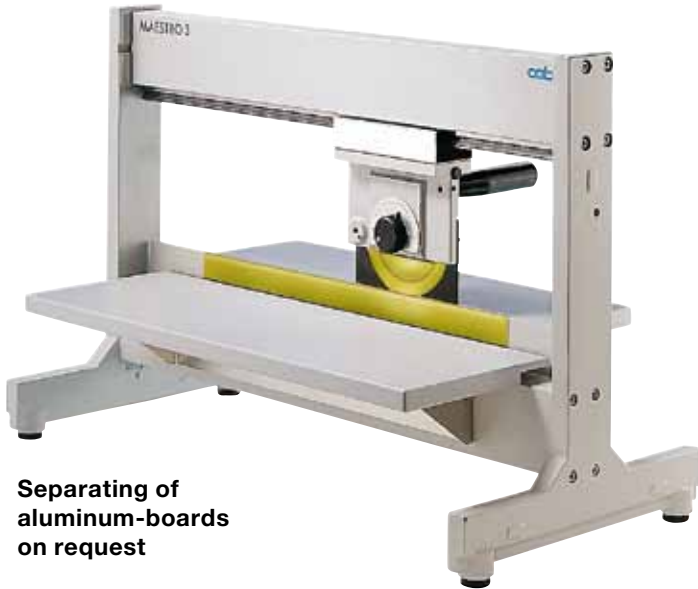


Separating of aluminum-boards on request

MAESTRO 3E separates both small and large pre-scored PCBs. The table and the rest can be continuously adjusted to the most suitable working position. The slit between the linear blade and the rest can be adjusted to ensure that the side strips fall through and are sorted out.

Safe Operation

The PCB is placed with its pre-scored groove onto the linear blade and the circular blade is then drawn by hand across the PCB. The clearance between the upper guide and the linear blade is adjustable to ensure that the PCB is only separated in the pre-scored groove.

Maximum height of components next to the groove.	
If components project above the groove, the linear blade needs to be cut out. In such a case contact us.	
PCB thickness A	0.8 - 3.2 mm
Remaining PCB thickness B	typical 1/3 of Dim. A, max. 0.8 mm
Depth of scoring C	min. 0.25 mm
Increase in external dimensions after separation	0.1 - 0.2 mm
The pre-scored grooves can be interrupted by cutouts with a length of up to approx. 5 mm.	
Technical data	
Separation type	Component side circular blade Solder side linear blade
Operation	by hand
Separation length	max. 450 mm
Earthing stud	Ø 10 mm
Storage/transport temp.	10 - 35° C
Storage/transport temp.	-20 - 50° C
Humidity, not condensing	10 - 85%
Safety regulations	CE, FCC class A
Weight	22 kg
Dim H x W x D	455 x 350 x 700 mm

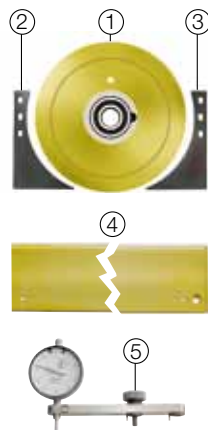

Part No.	Description		
8933945	PCB Separator MAESTRO 3E/450		
Pos.	Part No.	Consumables	PU
1	8930509.001	Upper circular bladeSchutz	1
2	8930603.001	Guide 2 up to serial no. 1999	1
2	8936615.001	Guide 2 from serial no. 2000	1
3	8930602.001	Guide 1 up to serial no. 1999	1
3	8936614.001	Guide 1 from serial no. 2000	1
4	8933394.001	Linear blade 450/370	1
Pos.	Part No.	Accessories	PU
5	8970208.001	Dial gauge for MAESTRO 3/4M	1

- *Headquarters in Germany*
- *cab subsidiaries*
350 distribution partners
in more than 80 countries.

cab is represented in every active commercial center - worldwide.



www.cab.de

Germany

cab Produkttechnik
GmbH & Co KG
Postfach 1904
76007 Karlsruhe
Wilhelm-Schickard-Str. 14
76131 Karlsruhe
Telefon +49 721 6626-0
Telefax +49 721 6626-249
www.cab.de
info@cab.de

Representatives in other countries on request.

France

cab technologies s.a.r.l.
67350 Niedermodern
Téléphone +33 388 722 501
www.cab.de/fr
info.fr@cab.de

USA

cab Technology Inc.
Tyngsboro MA, 01879
Phone +1 978 649 0293
www.cab.de/us
info.us@cab.de

South Africa

cab Technology (Pty.) Ltd.
2125 Randburg
Phone +27 11-886-3580
www.cab.de/za
info.za@cab.de

Asia 亚洲

cab Technology Co, Ltd.
希爱比科技股份有限公司
Junghe, Taipei, Taiwan
Phone +886 2 8227 3966
www.cab.de/tw
info.asia@cab.de

China 中国

cab (Shanghai) Trading Co., Ltd
铠博(上海)贸易有限公司
Phone +86 21 6236-3161
www.cab.de/cn
info.cn@cab.de

This documentation and any translations hereof are the property of cab GmbH & Co KG.

The replication, processing, reproduction or distribution in whole or in parts requires our prior written consent. © Copyright bei cab/9008452.

All delivery, design and technical specifications are compiled to the best of our current knowledge and are subject to change without prior notice.